A Family Passion, since 1972.

300 | 350 G INOX - B

Affettatrice a gravità inox - Stainless steel gravity slicer

300 | 350 G INOX - B

Trasmissione a cinghia
Belt transmission

100% INOX

- **Grande precisione di taglio**
- **Carrello smontabile**
- **Macchina smontabile**
- **Impermeabilità**
- **Facilità di pulizia**

- **High cutting precision**
- **Removable carriage**
- **Removable machine**
- **Waterproofness**
- **Easy cleaning**

IT **Interamente prodotta in Inox Aisi 304.** Resiste alla corrosione. Affidabilità di funzionamento e semplice da pulire grazie a un design ergonomico con un carrello smontabile. Struttura molto rigida. **Spessore della fetta regolabile con grande precisione da 0 a 25 mm.** Trasmissione a cinghia ad alte prestazioni senza tenditore. Affilatoio indipendente, molto facile da usare: una semplice manovra della manopola graduata consente un'affilatura perfetta; operazione che può essere effettuata agevolmente e velocemente da qualsiasi operatore. Carrello scorrevole e molto fluido, grazie al sistema di guida ben strutturato. La robustezza e la qualità dei componenti, insieme alla cura del montaggio e alla loro regolazione, permettono a questa macchina di realizzare un taglio perfetto e molto fine. Gruppo piatto e paralama lavabili in lavastoviglie. Equipaggiata da un motore monofase di 0,27 o 0,37 CV.
Indice di protezione dell'affettatrice: IP 63.
Certificazione: UL NSF CSA.

EN **Made entirely of AISI 304 stainless steel.** Corrosion-resistant. Reliable operation and easy to clean thanks to an ergonomic design with a removable carriage. Very rigid structure. **Slice thickness can be adjusted with great precision, from 0 to 25 mm.** High-performance thanks to belt transmission without a tensioner. Independent sharpener, very easy to use: a simple movement of the graduated knob allows perfect sharpening; an operation that can be performed easily and quickly by any operator. The carriage slides smoothly, thanks to the well-structured guiding system. The robustness and quality of the components, together with the careful assembly and their adjustment, allow this machine to produce a perfect and very fine cut. The plate assembly and blade guard are dishwasher-safe. Equipped with a single-phase motor of 0.27 or 0.37 HP.
Slicer protection rating: IP 63.
Certification: UL NSF CSA.

Sistema di regolazione ad alta precisione
High-precision regulation system

Affilatoio indipendente
Independant sharpener

Caratteristiche tecniche - Technical features

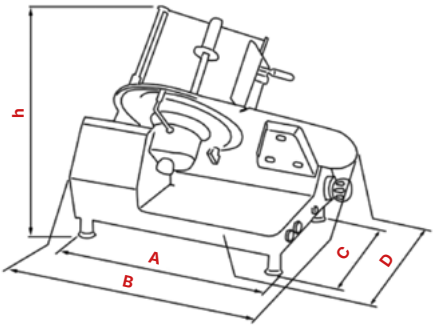

	300	350
A	mm 511	mm 574
B	mm 634	mm 678
C	mm 365	mm 398
D	mm 508	mm 537
h	mm 476	mm 535

	ø Lama ø Blade	Motore V220/monofase Motor V220/single phase	Basamento Frame	Spessore taglio Cut thickness	Capacità di taglio Cut's capacity
300 G INOX - B	mm 300	Kw 0,20 - 0,27 CV	100% acciao inox	mm 0-25	ø mm 200 □ mm 250×160
350 G INOX - B	mm 350	Kw 0,27 - 0,37 CV	100% stainless steel	mm 0-25	ø mm 250 □ mm 280×190

NOAW s.r.l.
Via Colombera, 27
21048 Solbiate Arno - VA
+39 0331 219723
info@noaw.it
noaw.it

Scopri il catalogo
Download catalogue